LEITENBERGER
Mess- und Regeltechnik GmbH
Bahnhofstraße 32/33
D-72138 Kirchentellinsfurt
Fon: +49 (0)7121/908-0
Fax: +49 (0)7121/908-200
E-Mail: mrt-info@leitenberger.de

KFM_VA
Capsule Pressure Gauge - All Stainless Steel Construction

Capsule Pressure Gauges EN 837-3 - Snap-in window, wetted parts in copper alloy

Service intended: Suitable for all gaseous media that will not obstruct the pressure system e.g. for chemical industry.

- protection: IP 45
- connection: DS 63: 1/4 BSP M INOX (SW 14)
  DS 100: ½ BSP M INOX (SW 22)
- other threads: (e.g. NPT) on request
- window: glass
- zero point adjustment: adjusting screw in dial
- accuracy: aclass 1.6 (±1.6 % FS)
- ranges: according to Norm
  0/25 mbar to 0/1000 mbar
- pressure, vacuum and compound

options:
- special dial (logo, special graduation etc.)
- laminated safety glass window (DS 100)
- case with BLOW OUT (DS 100)
- accuracy class 1.0 (DS 100)

Panel cut-ou (mm)

NG	Typ F*	Typ KB*
63	65	not available
100	105	103

Dimensions (mm)

NG	b	b1	b2	c	D	d1	d2	d3	G	h	SW
63	39	45	53	11	64	75	85	3,5	1/4“	61	14
100	49	55	87	15	101	116	132	4,8	1/2“	78	22

Mounting styles

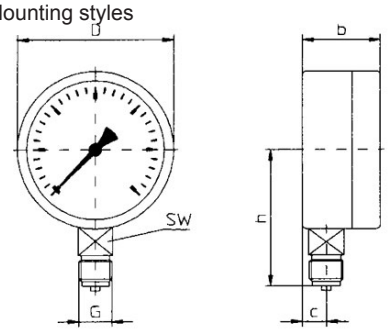

Typ R*
bottom connection

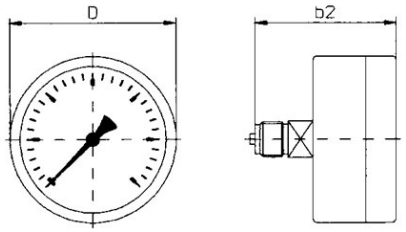

Typ P*
centric back connection

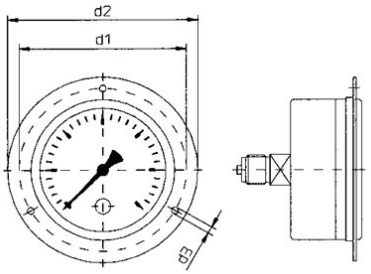

Typ F*
centric back connection
with front flange
for panel mounting

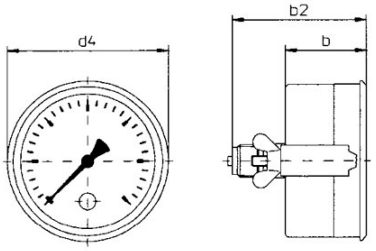

Typ KB*
centric back connection
with u-clamp for panel-mounting

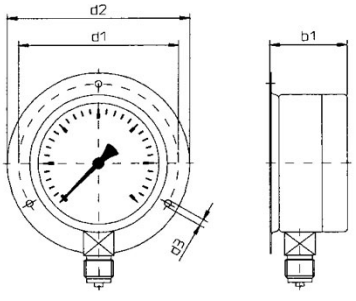

Typ H*
bottom connection
with back flange for wall mounting

ISO 9001:2008
Reg.no. 12 100 24343 TMS

© 2016 / Leitenberger