


02.43 Thermometer In Inox-Case For Surface Mounting With Back Flange

LEITENBERGER
Mess- und Regeltechnik GmbH
Bahnhofstraße 32/33
D-72138 Kirchentellinsfurt
Fon: +49 (0)7121/908-0
Fax: +49 (0)7121/908-200
E-Mail: mrt-info@leitenberger.de

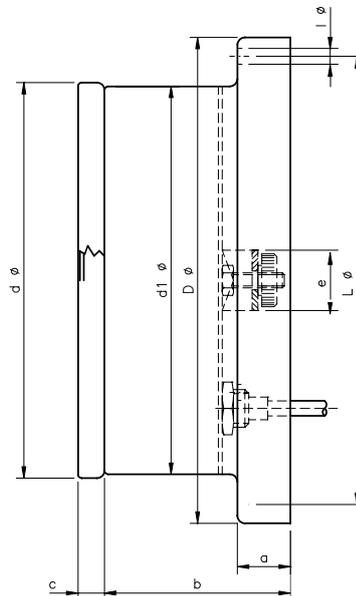

Type	a	b	c	d	d1	e	D	I	L
1100 HBR/V	14	50	7	105	102	16	128	4,2	116

Case:	Stainless Steel
Mounting:	Surface Mounting with Back flange
Window:	Makrolon, clear, temperature resistant up to + 65°C
Back flange:	Stainless Steel
Measuring System:	Double bourdon spring system, with bimetal compensation
Dial:	White with black prints
Scale length:	approx. 270 [°]
Scale graduation:	1°, 2°, 5°, 10° depending on range
Range:	Between -80 ... +380 °C
Accuracy:	± 2% at +23 °C ambient temperature
Pointer:	Black
Capillary connection:	Back
Protection:	IP 65 according DIN EN 60529 / IEC 529

Options:	- customized dial, coloured scale
	- Accuracy ± 1%, ± 1,5%
	- drag pointer
	- back adjustment
	- glycerin filling
	- NG 100 window of glass
	- capillary bottom connection